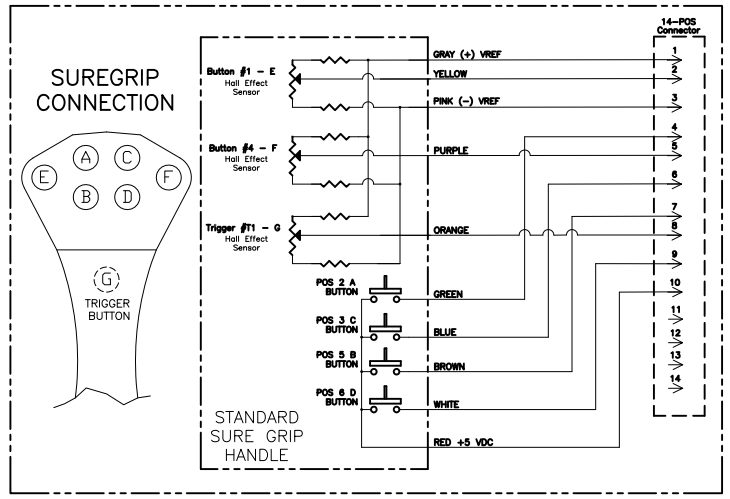

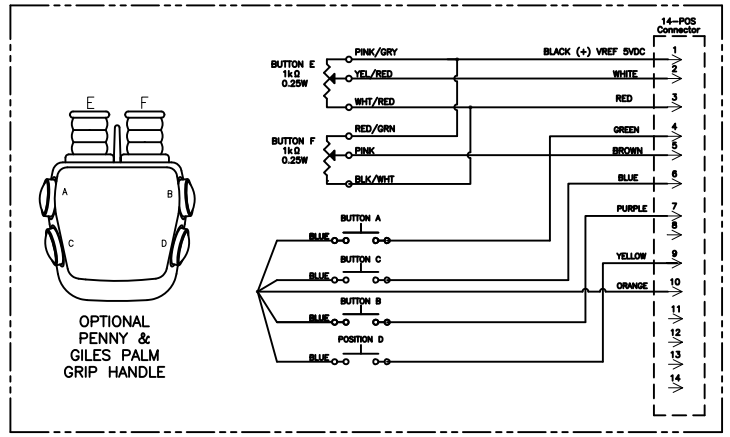

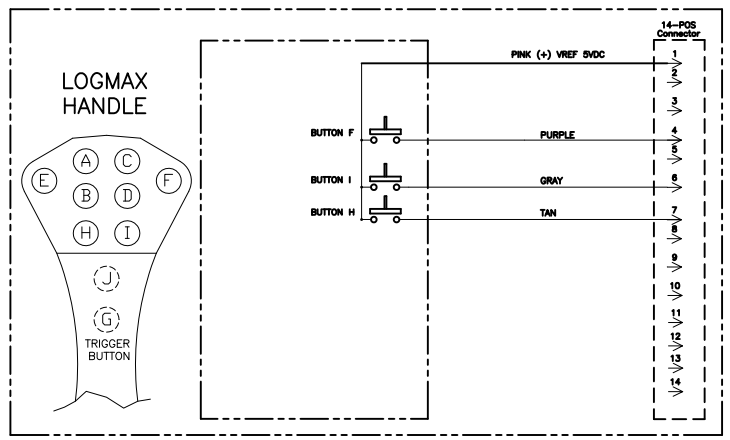

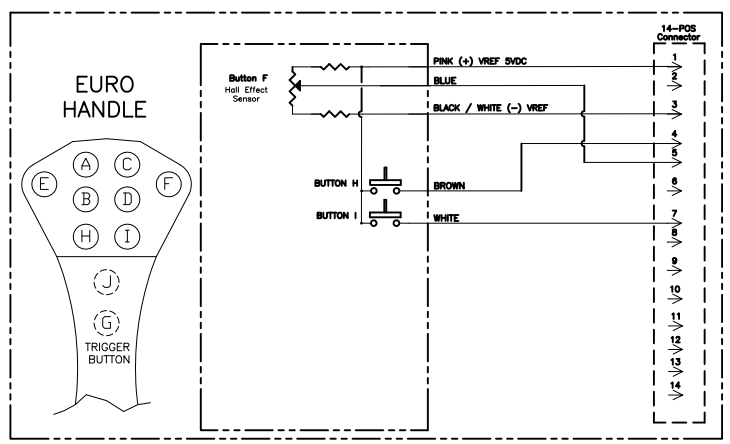

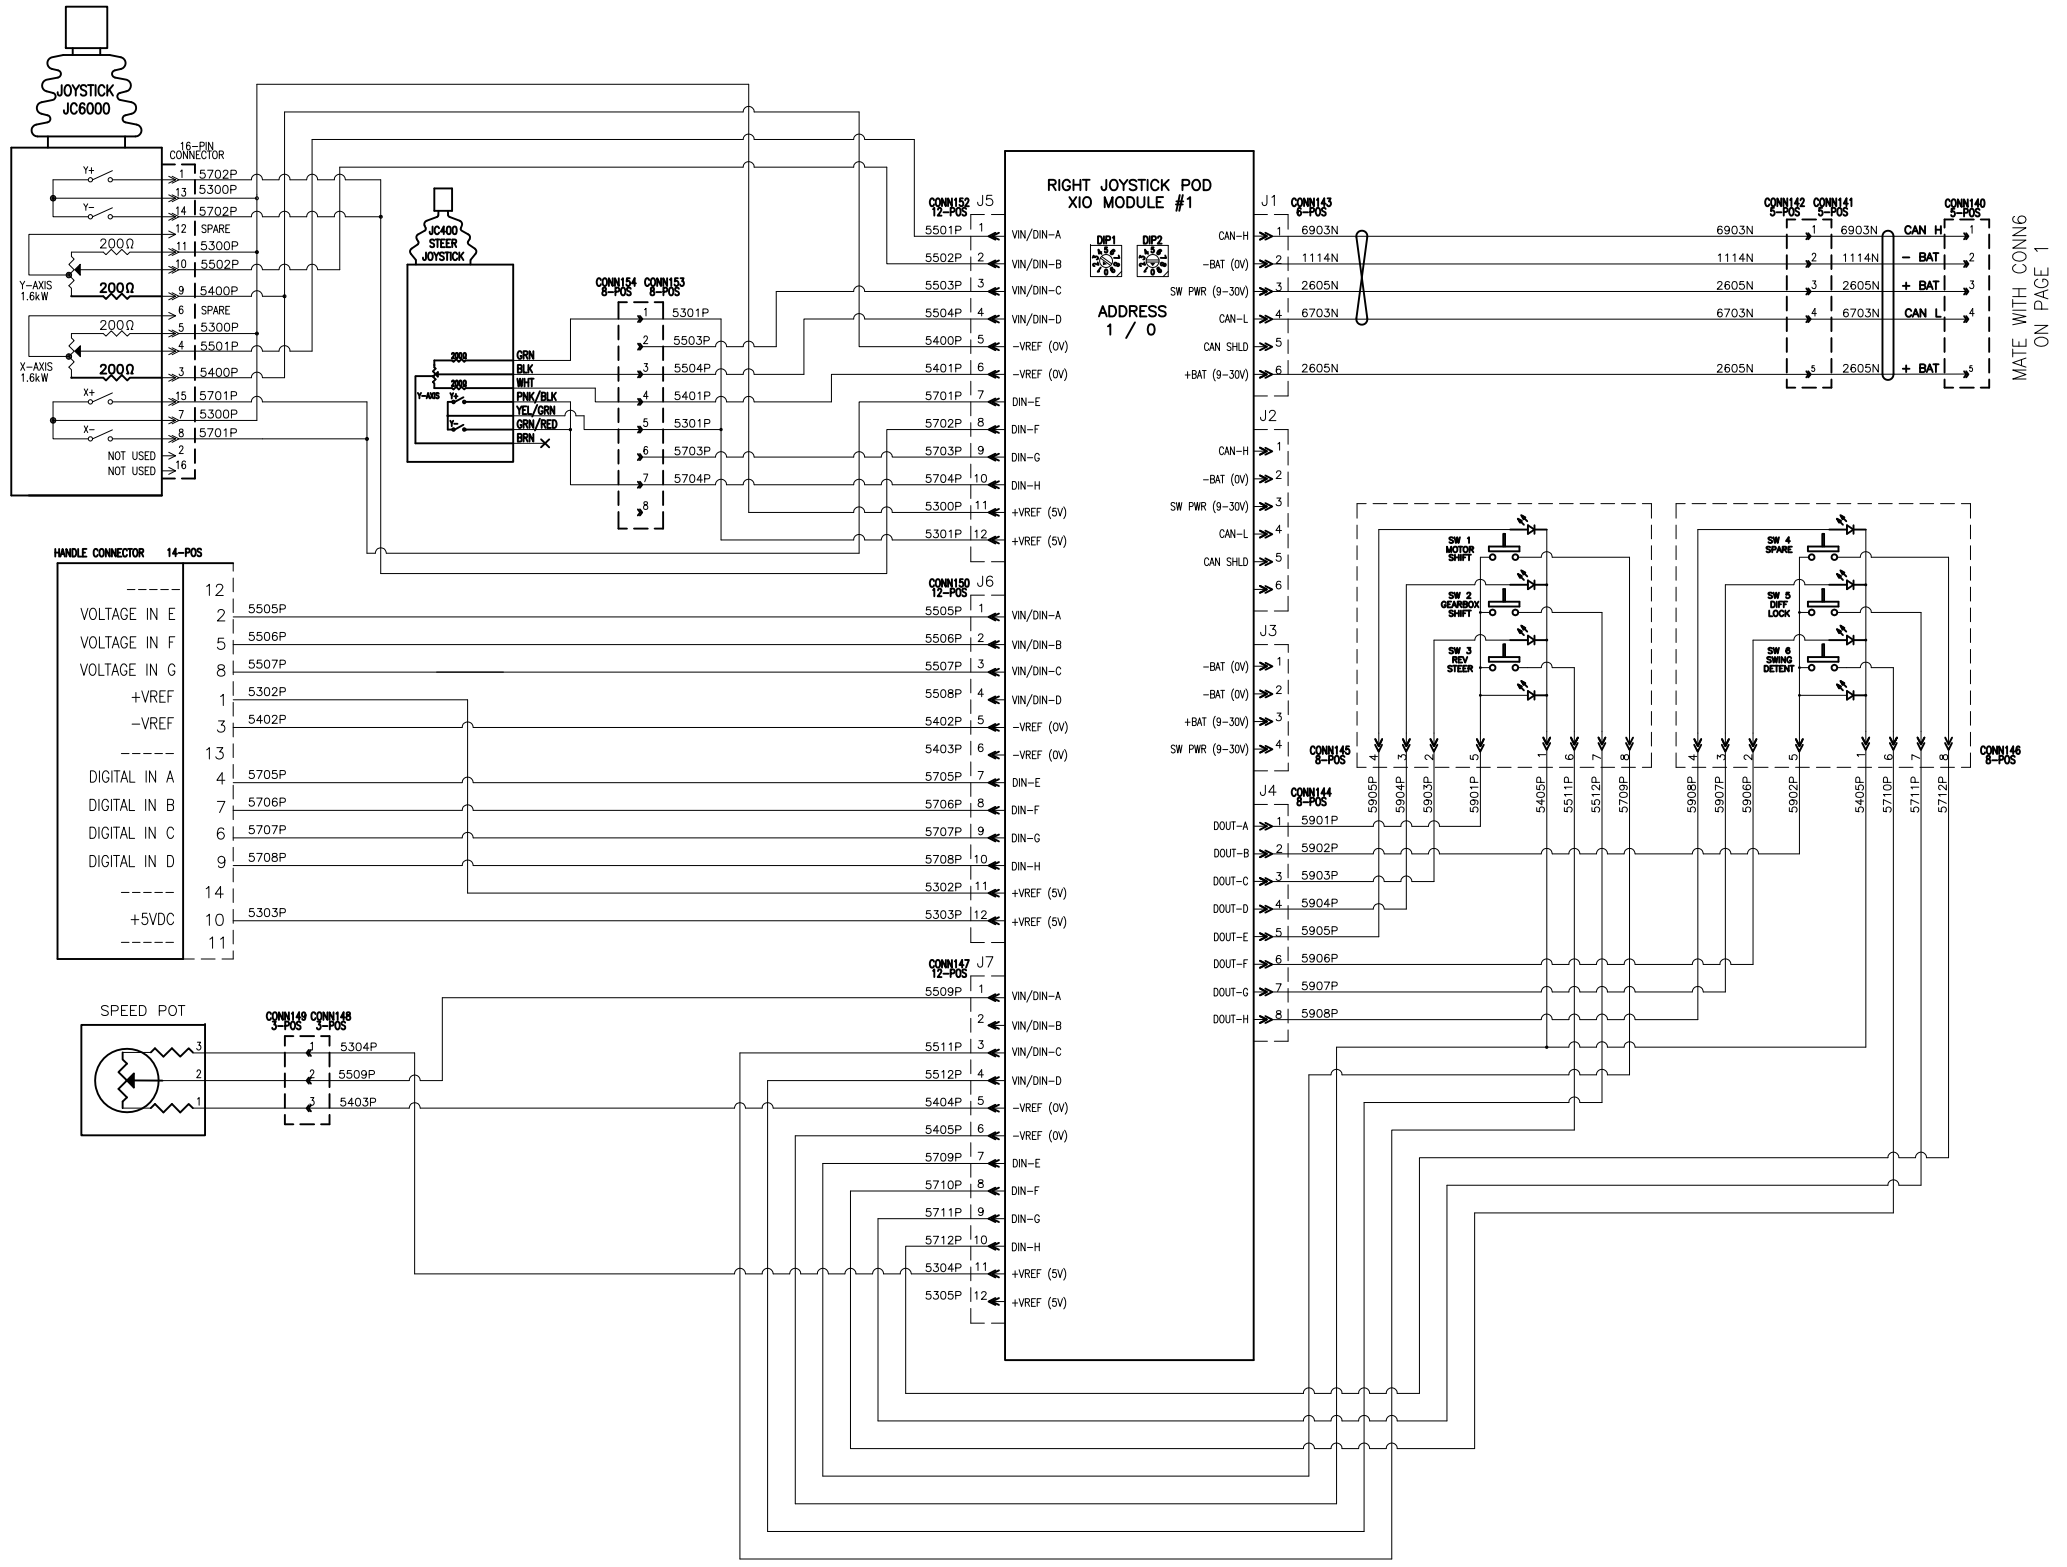

SUFFIX LETTER	WIRE SIZE	LOAD RANGE
A	4/0	300–350
B	3/0	250–299
C	2/0	200–249
D	0	150–199
E	1	100–149
F	2	75–99
G	4	50–74
H	6	40–49
I	8	30–39
J	10	20–29
K	12	15–19
L	14	10–14
M	16	5–9
N	18	3–4
O	20	1–2
P	22	0–1

NOTES:
1) – ALL WIRES MUST BE SIZED ACCORDING TO SUFFIX LETTER CODE UNLESS OTHERWISE NOTED.
2) – CABLE MUST BE LABELED WITH PART NUMBER AND REVISION LETTER.
3) – CABLE MUST BE BRAIDED AS INDICATED.
4) – ⟡⟡ – INDICATES TWISTED WIRES FOR CAN/J1939 COMUNICATION.
5) – ALL WIRES EXCEPT OLFLEX SHALL BE BLACK JACKETED WITH WHITE PRINT INDENTIFYING EACH WIRE PER NUMBER SHOWN IN THIS DRAWING. WIRE NUMBER SHOULD BE PRINTED EVERY 3 TO 4 INCHES ALONG WIRE LENGTH.

TimberPro, INC
SHAWANO, WISCONSIN 54166

TITLE:			
RIGHT JS POD – WHEELED MACHINE			
DRAWN BY: JEFF	DATE: 02/29/08	SCALE:	
SHEET: Page 5	FIN. WT:		D

THIS DRAWING IS THE PROPERTY OF TIMBERPRO, INC. ANY REPRODUCTION OF THIS DRAWING, IN FULL OR IN PART, OR DISCLOSURE OF ITS CONTENTS WITHOUT WRITTEN CONSENT FROM TIMBERPRO, LLC IS STRICTLY PROHIBITED.